



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 29 JUL 2003

WIPO

PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Andrew Jones

Dated 7 July 2003

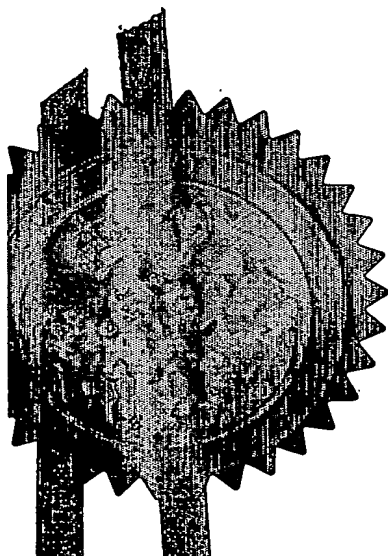



The
Patent
Office

17JUN02 1726143 1 075137
P01/7700 0.00-0213774.3

1777

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference SPG/P036734

2. Patent application number
(The Patent Office will fill in this part)

15 JUN 2002

0213774.3

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Osseobiotek Limited
Yorkshire House
Greek Street
Leeds
LS1 5SX

08238560001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention Prosthesis

5. Name of your agent (if you have one)

Harrison Goddard Foote

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

31 St Saviourgate
York
YO1 8NQ

Patents ADP number (if you know it)

14571001

07914237002

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Yes

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 13

Claim(s) 5

Abstract

Drawing(s) 7

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

S.P. Gillholm 14 June 2002

12. Name and daytime telephone number of person to contact in the United Kingdom S P Gillholm 01904 732120

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Prosthesis

The present invention is directed to a novel dental prosthesis and to a novel method of treatment related thereto.

5

In particular the present invention relates to a novel dental arrangement, including a novel prosthesis and an implant kit which provides improved treatment.

10 An arrangement will generally comprise an implant which is anchored in the jawbone and protrudes from the gingival region. An abutment is then anchored in the implant and forms the site for reconstruction of the tooth. The tooth reconstruction will often comprise fitting, e.g. cementing, casting or welding a metal cast onto the abutment and fusing porcelain onto the metal cast.

15 In a device for the reconstruction of missing or lost teeth, an implant, which ends in the gingival region, is biologically anchored in a jawbone. The implant acting as the anchoring site for an abutment, which in turn forms the reception site for the tooth being reconstructed. The external surface of the abutment is adapted to a coping. The coping is made in an acrylic, which can be supplied in a kit with copings of several
20 suitable anatomical shapes including for example different transgingival margins and cross-sections, heights, diameters and angulations, forms the base for reconstruction of the tooth by the lost wax-technique. The coping and the abutment can be individually prepared to represent the retention shape of the tooth being reconstructed. The method using a precious alloy abutment is an evolution of the so-called UCLA abutment. The method is also suitable for other metal abutments,
25 preferably in titanium or CoCr, where the casting from the prepared coping is joined to the metal abutment by for example laser welding.

The restoration of a tooth on a dental implant can be made using several well known
30 techniques. First there is a choice between so called cemented solutions (porcelain and ceramic cemented on the retention shape of the tooth being reconstructed) or screw retained solutions (porcelain and ceramic on a precious metal coping or bridge

screwed onto the abutment). Cemented solutions are mainly based on individually prepared abutments while screw retained solutions generally are based on ready machined components. Secondly if it is a single tooth case compared to a multiple unit case like a partial or bridge, then non-rotational or rotational abutments in relation to the implant need to be considered.

For a cemented solution one of the treatment steps is to manufacture a retention shape of the tooth being reconstructed on the implant. There are several methods and products suitable for performing this part of the treatment. In a case where an especially aesthetic soft tissue margin is desired there are non-precious, e.g. titanium, preable abutments which can be divided in three groups for single and multiple tooth restorations:

- Type I - blanks (i.e. TiAdapt™ - Nobel Biocare) or blanks with a plastic sleeve for wax-up (i.e. Preci Disc - CEKA)
- Type II - anatomical (i.e. Straight and Angled Esthetic™ - Nobel Biocare, FRIALIT®-2 EstheticBase - Friadent, Bio Anatomic Line® - Oraltronics) with prepared margins
- Type III - Individually machined non-precious abutments (i.e. Procera® Abutment - Nobel Biocare and other CAD/CAM related techniques from, for example, KaVo- or 3M ESPE - Lava) which also includes producing custom made partials or bridges.

Another common technique to achieve highly aesthetic soft tissue margins involves cast-on precious metal abutments for single and multiple tooth restorations:

- Type IV - Plastic sleeves for wax-up support, i.e. the UCLA-type (UCLA - 3i, Auradapt - Nobel Biocare, FRIALIT®-2 AuroBase - Friadent) where the plastic part is pre-mounted on the metallic abutment for each different abutment diameter.
- Type V - A similar type as IV is the "Cast-To" Gold Abutments (Sulzer Dental) where the components feature a gold base and a plastic sheath, which is incorporated into the abutment pattern and cast onto the base, and with the option to purchase different plastic sheaths with different emergence profiles.

Type VI - and others for direct wax-up (i.e. Multi Unit abutment, Nobel Biocare).

5 A common feature with these, Type I-V, is that the connection surfaces with the implant and the abutment screw is machined and therefore exhibits high tolerances and smooth surfaces and includes an extensive assortment. There also exists prepreable blanks wholly made in burn-out plastics:

10 Type VII -a plastic coping, for example with internal octagon (ITI), or prepreable anatomical abutments like the Castable Abutment System, i.e. C.A.S. Esthetic (Oraltronics). The common feature with these is that the connection surfaces with the implant and the screw will be formed during casting.

15 In order to provide a solution for different anatomical situations a dental implant system normally comprises of several implant diameters with a corresponding abutment size, i.e. fully castable abutments like the C.A.S. Esthetic (Oraltronics) or for the UCLA-technique represented by the AurAdapt or GCTF of the Branemark System (Nobel Biocare). The general assortment of non-precious metal abutments generally consists of different diameters and in addition also different heights and angulations.

20 A conventionally known dental arrangement, comprises an implant, abutment and a coping screwed into the abutment.

25 However, such arrangements suffer from a number of disadvantages. The *in situ* preparation of titanium abutments (type I-II above) and copings is time consuming and still requires different diameters, angulations or heights of the copings with a subsequent large assortments of the expensive metal part and high costs for the dental technician work. Specifically the margin on the copings may be difficult to create.

30 Individually machined abutments like the Procera Abutments (Type III above), are only available from a specific supplier, in this case Nobel Biocare,, which normally

requires, *inter alia*, complicated logistics. The original aim with introducing the Type III prosthetic solutions was to use a cheaper and more bio-compatible material than the more conventionally used precious alloys represented by Types IV-VII, and to achieve an absolute passive fit between the prosthetics and the implant by using a machined material and not a cast material, with subsequent problems like porosities and distortion after casting. However, during the last 5-7 years the casting technique for titanium and other related techniques, like laser and X-ray, has considerably improved the casting results leading to tolerances and a passive fit to the implants equal to conventional precious metal solutions, for example, Type IV-VI and the CAD/CAM solutions, Type III.

The other solutions, Type I-II and Type IV-Type VII, generally requires the clinician or dental technician to hold relative large and expensive stocks of such abutments, especially since there is no simple solution that can be applied to all clinical situations with a choice of non-precious or precious material.

Furthermore, precious metal abutments (type IV-V above) require several manufacturing steps for the dental technician, i.e. transgingival margins and emerging profiles to waxed-up, trimming or milling to obtain optimum angulations. Conventionally known plastic copings offer little or no support in this. However, type V above facilitates a somewhat easier preparation since a few options of emergence profiles are available, but since these have to be purchased separately the overall gain is little.

In order to achieve the right fit, the part, i.e. the abutment, that connects to the implant must be machined, *inter alia*, to avoid voids between the parts and a subsequent microleakage. Thus, the type VII abutment is unsuitable for use with the existing casting techniques.

Another reason for having a machined abutment, and not a cast abutment, connecting to the implant, is that the abutment screw may require a specific preload to withstand the forces on the prosthetic construction in function. This can only be achieved if the

seating surface of the screw on the abutment and the connecting area between the implant and the abutment, are both machined.

5 A poor fit between the abutment screw and the connecting area lead to rotational movements and can also cause screw loosening. Indeed, some of the most advanced abutment connections prove to be impossible to cast.

10 In summary, the problem with prior art arrangements is that, *inter alia*, they are generally not adapted to be worked up by a dental technician in a local laboratory with common laboratory equipment or, alternatively, the dental technician will have an extremely wide range of prostheses to have to choose from.

We have now developed a novel dental prosthesis arrangement which overcomes or mitigates the disadvantages of prior art approaches.

15

In particular we have developed a novel dental prosthetic abutment and a novel coping, which enables an improved dental prosthesis to be prepared.

20

Thus, according to a first aspect of the invention we provide a prosthetic dental abutment coping characterised in that the coping is adapted to be rotatably mounted and is anatomically resemblant to a tooth.

25

Of course, it is within the scope of the present invention for the coping to be resemblant of a tooth prosthesis or prepared tooth.

30

It is an important aspect of the present invention that the coping is adapted to be rotatable. The provision of a rotatably mounted coping is advantageous in that, *inter alia*, it provides the technician with 360 degrees of freedom. Existing copings for are provided in premounted form, which means that they are generally cylindrical and therefore lack important anatomical features, which presents difficulties to the technician in working up the coping.

In a further preferred embodiment the coping may be adapted to form a snap fit with the abutment. The term snap fit will be well understood by those skilled in the art. Thus the term should be construed as meaning any conventional, e.g. non-screw fitting, whereby the abutment and the coping can form a snug engaging fit with one another. Other such similar terms which should be included in the term snap fit are, e.g. snug fit, push fit, etc. Another method is to fit the coping to an abutment by means of the pre-load, e.g. from a screw.

The anatomically resemblant copings of the invention are advantageous in that, *inter alia*, they enable the dental technician to be provided with a limited selection of copings. Thus, preferably the novel copings of the invention may anatomically resemble a molar, a premolar a canine or an incisor; resulting in the achievement that only a limited assortment of abutments is required, e.g. preferably four for each size per implant connection geometry.

Thus in a further aspect of the invention we provide a kit of parts comprising at least an abutment and a selection of copings as hereinbefore described.

Preferably, the kit of parts comprises a plurality of copings and, optionally, a plurality of abutments. In a further preferred embodiment the kit of parts as hereinbefore described may also comprise one or more dental implants.

The coping, the abutment and/or the arrangement as hereinbefore described are each novel *per se*.

Thus, according to a further aspect of the invention we provide a dental abutment which is adapted to form a rotatable fit with a coping as hereinbefore described.

In an especially preferred aspect of the invention the abutment may be provided with means for forming a stable retraining joint with the coping. Preferably, the coping may also comprise corresponding means for forming a stable retaining joint with the abutment.

Conventionally known retaining means may be used. However, preferentially, the stable retaining means may comprise an annular recess and an annular lip adapted to engage with one another. Thus in one embodiment, the stable retaining means may
5 comprise an abutment provided with an annular lip and a coping provided with an annular recess.

However, in the most preferred embodiment the abutment will be provided with an annular recess and the coping may be provided with an annular lip.

10

For the reseating of a cast on an abutment the aforementioned retentive feature should not interfere with the abutment so that is why it must be able to be removed and/or deactivated, which substantially always is the case for non-precious alloys intended to be join to the abutment by other means than being directly cast on to the
15 abutment. The annular lip on the coping, proposed above, or cast can therefore be removed prior or after casting, whichever is considered to be the most convenient.

The reseating of the cast can be facilitated by involving removable scotch or paint which during casting forms a base for the retentive feature of the snap-on function
20 but if placed on the abutment easily can be removed prior to reseating

In a device for the reconstruction of missing or lost teeth, an implant, which ends in the gingival region, is biologically anchored in a jawbone. The implant acting as the anchoring site for an abutment, which in turn forms the reception site for the tooth
25 being reconstructed. The external surface of the abutment is adapted to the internal geometry of a coping and there are means to obtaining a stable join between the abutment and the coping during the preparation of the restoration. The coping is made in an acrylic or other suitable burn-out material, which can be supplied in a kit with copings of several suitable anatomical shapes including for example different
30 transgingival margins and cross-sections, heights, diameters and angulations, forms the base for reconstruction of the tooth by the lost wax-technique. The coping and the abutment can be individually prepared to represent the retention shape of the

tooth being reconstructed. The method using a precious alloy abutment is an evolution of the so-called UCLA abutment. The method is also suitable for other metal abutments, preferably in titanium or CoCr (cobalt chrome), where the casting from the prepared coping is joined to the metal abutment by for example laser
5 welding.

The coping may be prepared from a variety of materials such as a so-called "burn out" plastic or wax material which is familiar to dental technicians creating cast metal restorations using the lost-wax technique. A suitable plastic material is
10 LEXAN 141R (in a clear 111 grade) available from General Electric. This material can be ground or otherwise machined to a desired customised shape.

According to a further aspect of the invention we provide a method of preparing a dental prosthesis which comprises the use of a kit or an arrangement as hereinbefore
15 described.

The arrangement and the novel copings and/or the kit of the invention are advantageous in that, *inter alia*, they:

20 Allow easy, fast and flexible preparation by the technician or the clinician by providing customised optimal near finish line or transgingival margin, transgingival cross-sections, angulation and emergence profile as well as avoiding or minimising any trimming of metal since the major part of the trimming can be made in the plastic.

25 Bring implantology closer to conventional dentistry by providing a much easier and faster way to prepare the retention shape of a tooth being reconstructed.

Provide a predictable interface between the abutment and the implant and the
30 abutment screw providing stable preload and tight fit between the implant and the abutment.

Require no or little needs for different abutment heights or angulations reflecting in a low overall system stock level for the individual clinician, technician, clinic, hospital and even the manufacturer.

- 5 Provide a method which is also suitable for other metal abutments, preferably in titanium, where the casting from the prepared coping is joined to the metal abutment by for example laser welding. Since titanium is a biocompatible material compared to gold this is a preferable solution as well as for patients allergic to gold. CoCr is also a metal that can be used according to the principles of titanium.

10

Can be incorporated and used with all major existing implant systems. The plastic coping and the abutment can also be used together with CAD/CAM techniques and relative methods, where it provides faster preparation.

- 15 Can provide a business solution where the technique is provided to several manufacturers by adjusting the abutment interface to the specific implant system.

Especially effective on implant level since it will exclude the expensive abutment, but still the solution can be adapted to abutment level.

20

The invention will now be described by way of example only and with reference to the accompanying drawings, in which Figure 1 illustrates an implant with abutment and the restored crown in bone;

- 25 Figure 2 illustrates an abutment and plastic coping designs with retentive feature;

Figures 3-4 illustrate plastic coping designs including different transgingival height, angulation emergence profile;

- 30 Figure 5 illustrates the transgingival cross-sections of plastic coping

Figures 6-7 illustrate restorative procedures with precious metal abutment; and

Figures 8-9 illustrate restorative procedures with non-precious metal abutment including joining.

5 Referring to Figure 1; for the reconstruction of missing or lost teeth, an implant (1), which ends in the gingival region (2), is biologically anchored in a jawbone (3). The implant acting as the anchoring site for an abutment (4), which in turn forms the reception site for the tooth being reconstructed (5) with a metallic cast (6) on the abutment (4) and porcelain (7) fused on the cast (6). After placement of the implant
10 an impression is taken for replicating the position of the implant prior to the restorative work. Impression on fixture level is an increasingly used method for reasons like accuracy, price, earlier loading, one-stage surgery. A so called master cast or stone model is made with a fixture replica providing a base for the continuing restoration. The restorative solution according to the invention is a cemented solution
15 for both single tooth solutions and multiple unit restorations, even though excess holes in an appropriate position can permit screw retained retrievability.

Referring to Figure 2; the external surface (8) of the abutment (9) is adapted to the internal geometry (10) of a plastic coping (11) according to the invention and fig 2.
20 There are means (12', 12'') to obtain a stable and retaining joint (13) with high tolerances and fit between the abutment and the coping mating surfaces (14', 14'') during the preparation of the restoration. This retention can for example be obtained by means of friction, mechanical locking, temporary cement, removable scotch, removable paint or combination thereof.

25

Referring to Figures 3 and 4; a set of burn-out plastic copings, with anatomical transgingival margins 15 that follow the mesial (16') and distal contour (16''). A set includes different anatomical copings for different anatomical positions like the anterior mandible (narrow teeth), the anterior maxilla (angulated teeth) or the
30 posterior regions (larger emergence profiles and diameters). The anatomical designs include copings with low margins (17) to high margins (18), fig 3b, narrow margins (19) or wide margins (20), fig. 3c, and angulated copings with angulations up to 40 °

degrees, but preferably 15 ° (21) to 30 ° (22), fig 4. Other anatomical design features are different transgingival cross-sections fig. 5 with round (23), oval (23') and triangular (23''), different heights (24, 24', 24''), fig. 3b, and emergence profiles (25, 25', 25''), fig 3c. The heights are preferably from 1-5 mm. Each set can be produced from the same mould and even held together by the spurs in its as delivered condition. Together with the anatomical copings proper blanks and/or instruments can be included in the kit and on spur. With each abutment, which for example is made in a precious metal or non-precious like titanium, the clinician can be provided with the whole range of copings to choose from due to the effective production. Thus the set can be included with each abutment, but the copings can also be provided separately from the abutments, for example sorted by type but still they form a set of copings available for the clinician. The number of copings is below 30 and preferably below 20.

Referring to Figures 6 to 9; the coping (26, 27) is in most cases fitted by the dental technician on to an abutment (28, 29) by the means of an abutment screw (30, 31), fig 6, 8, on a fixture replica (32, 33) of the master cast (34, 35). Once in the appropriate surrounding with bone tissue levels (36) and/or soft tissue levels (37) the preparation starts with forming the reconstruction, preferably with wax (38, 39) and the subsequent lost wax-technique. If necessary the coping can be individually milled and trimmed (40), which requires that the coping is rotationally stable on the abutment as well as being able to with stand the bending forces. Also the abutment can be adjusted and trimmed (41), fig. 9, during this work, which normally is the case when an angulated abutment is needed.

Abutment bases according to the invention may be made of a variety of rigid dental materials, preferably metals such as dental gold, as can the substructure of the restoration. Depending on if it is a precious metal, fig 6-7, or non-precious, fig.8-9, abutment the procedures of the casting and forming of the metal base for the porcelain are to some extent different.

Example 1

Casting with precious metal abutment

After the preparation, the coping (43), the wax (44) and the abutment (42) are cast by conventional methods, for example the lost wax process as previously said, to form a solid body (45). The preparation has no limitations and the copings can be used when producing single crowns, partials or full bridges as well as for ball attachments according to any existing common procedures. This technique can be used also with non-precious metals but the bonding between the metal abutment and that cast will be poor with the existing casting techniques and metals. However there is another solution for non-precious materials, like titanium, as described below.

Example 2

Casting with non-precious metal abutment

When using a non-precious metal like titanium in the abutment (29) the preparation (39,46, 48) is lifted off from the abutment (47) and then the preparation is cast individually according to suitable techniques. To be able to re-seat the cast (49) on the abutment (50) the retention function of the retentive element (12") must be removed which is done either before casting on the preparation (48) or after casting (49) with a suitable method and/or tool. If it is an annular lip on the coping or on the cast the lip can be removed by a burr or similar tool. If it is a scotch then it is just peeled off. If it is a paint, the paint is removed by existing methods. When this is done the solid non-precious preparation (49) can be placed and joined to the abutment (50) by means of for example laser welding the contacting surfaces (51, 51'). To increase the strength, or as alternative joining methods, cementation can be used or an extra weld can be placed on the upper coronal part of the abutment (52). The laser weld (53) is easily polished to avoid irregularities in order to avoid plaque retention.

After the preparation of the metallic core (49+50) of the reconstructed tooth (5) the baking of the porcelain (I) can take place on the individually made or customised abutment containing the metal cast (II) joined to the abutment (III). Again the

preparation has no limitations and the copings can be used when producing single crowns, partials or full bridges as well as for ball attachments, even though for some rare cases the titanium cast is still not suitable since passive fit of for example a cast bridge might only be achieved by sectioning the final cast and subsequent joining by
5 laser or other appropriate method. The preferred solution with the method of casting in a non-precious metal like titanium is to fabricate an individual abutment which than can be a base for single crowns, partials or full bridges as well as for ball attachments.

10

15

P036734.2

Claims

1. A prosthetic dental abutment plastics coping characterised in that the coping is not premounted and is anatomically resemblant to a tooth.
- 5 2. A prosthetic dental abutment plastics coping according to claim 1 characterised in that the coping is adapted to be rotatably mounted.
3. A prosthetic dental abutment plastics coping according to claim 1 characterised in that the coping is resemblant of a tooth prosthesis.
- 10 4. A prosthetic dental abutment plastics coping according to claim 1 characterised in that the coping is resemblant of a preprepared tooth.
5. A prosthetic dental abutment plastics coping according to claim 2
- 15 characterised in that the coping is rotatably mounted degrees of freedom.
6. A prosthetic dental abutment plastics coping according to claim 2 characterised in that the coping is rotatably mounted with 360 degrees of freedom.
- 20 7. A prosthetic dental abutment plastics coping according to claim 1 characterised in that the coping is adapted to form a snap fit with the abutment and withstand rotational forces during the making of the tooth preparation
8. A prosthetic dental abutment plastics coping according to claim 1
- 25 characterised in that the coping is resemblant to a molar.
9. A prosthetic dental abutment plastics coping according to claim 1 characterised in that the coping is resemblant to a premolar.
- 30 10. A prosthetic dental abutment plastics coping according to claim 1 characterised in that the coping is resemblant to a canine.

11. A prosthetic dental abutment plastics coping according to claim 1 characterised in that the coping is resemblant to an incisor.
- 5 12. A prosthetic dental abutment plastics coping according to claim 1 characterised in that the coping comprises a "burn out" plastic or wax material.
13. A prosthetic dental abutment plastics coping according to claim 12 characterised in that the plastic material is LEXAN 141R.
- 10 14. A dental abutment plastics which is adapted to form non premounted engagement with a prosthetic dental plastics coping according to claim 1.
- 15 15. A dental abutment according to claim 14 characterised in that the abutment forms a rotatable fit with the coping.
16. A dental abutment according to claim 14 characterised in that the abutment is provided with means for forming a stable retraining joint with the coping during the preparation.
- 20 17. A dental abutment according to claim 14 characterised in that the coping also comprises corresponding means for forming a stable retaining joint with the abutment.
- 25 18. A dental abutment according to claim 14 characterised in that the stable retaining joint comprises an annular recess and an annular lip adapted to engage with one another.
- 30 19. A dental abutment according to claim 18 characterised in that the stable retaining means comprises an abutment provided with an annular lip and a coping provided with an annular recess.

20. A dental abutment according to claim 19 characterised in that the abutment is provided with an annular recess and the coping is provided with an annular lip.

21. A prosthetic dental abutment plastics coping according to claim 1
5 characterised in that it comprises a transgingival margin.

22. A prosthetic dental abutment plastics coping according to claim 1 characterised in that the abutment is provided with anatomical heights, emergence profiles and angulations.

10

23. A dental abutment according to claim 14 characterised in that the abutment material is a metal.

15

24. A dental abutment according to claim 23 characterised in that the metal is Au.

25. A dental abutment according to claim 23 characterised in that the metal is Ti.

26. A dental abutment according to claim 23 characterised in that the metal is CoCr alloy.

20

27. A dental abutment according to claim 23 characterised in that the abutment is adapted for non-rotational or rotational fitting with the coping.

25

28. A dental abutment according to claim 23 characterised in that the connection with the coping is in the form of one or more of a screw thread, snap-on, or friction.

29. A dental arrangement comprising a dental abutment and a prosthetic dental abutment plastics coping according to claim 1.

30

30. A kit of parts comprising at least a selection of copings according to claim 1.

31. A kit according to claim 30 characterised in that the copings are selected from a molar, a premolar, a canine and an incisor.
32. A kit according to claim 30 characterised in that the copings comprise at least one each of a molar, a premolar, a canine and an incisor.
33. A kit according to claim 30 characterised in that the kit also comprises one or more dental abutments.
34. A kit according to claim 30 characterised in that the kit also comprises one or more dental implants.
35. A kit according to claim 30 characterised in that the kit comprises a plurality of copings and a plurality of abutments.
36. A kit according to claim 30 characterised in that the kit comprises a plurality of anatomical copings (proper blanks) and/or instruments included on spur.
37. A kit according to claim 30 characterised in that the kit comprises a plurality of four copings for each size per implant connection geometry.
38. A method of preparing a dental prosthesis which comprises the use of a kit according to claim 27.
39. A method according to claim 38 characterised in that the coping and the abutment can be individually prepared to represent the retention shape of the tooth being reconstructed.
40. A method according to claim 38 characterised in that the method comprises casting from a prepared coping and joining to the metal abutment by, for example laser welding.

41. A method according to claim 38 characterised in that the coping is made in an acrylic or other burn-out materials, which can be supplied in a kit with copings of several suitable anatomical shapes.

5 42. A method according to claim 38 characterised in that the coping a "burn out" plastic or wax material and the prosthetics as prepared using the lost-wax technique including an abutment being cast in to the cast.

43. A method according to claim 38 characterised in that the stable retaining joint
10 comprises an annular recess and an annular lip adapted to engage with one another and wherein the annular lip may be removed or substantially removed using a burr or similar tool.

44. A method according to claim 38 characterised in that the annular lip may be
15 removed or substantially removed by friction blasting.

45. A method according to claim 38 characterised in that the stable retaining joint comprises a scotch tape that may be removed by peeling off.

20 46. A method according to claim 38 characterised in that the stable retaining joint comprises a pint that may be removed using existing methods known per se.

47. A dental, coping, abutment or kit substantially as described with reference to the accompanying drawings.

25

30

P036734.2

35

Fig 1

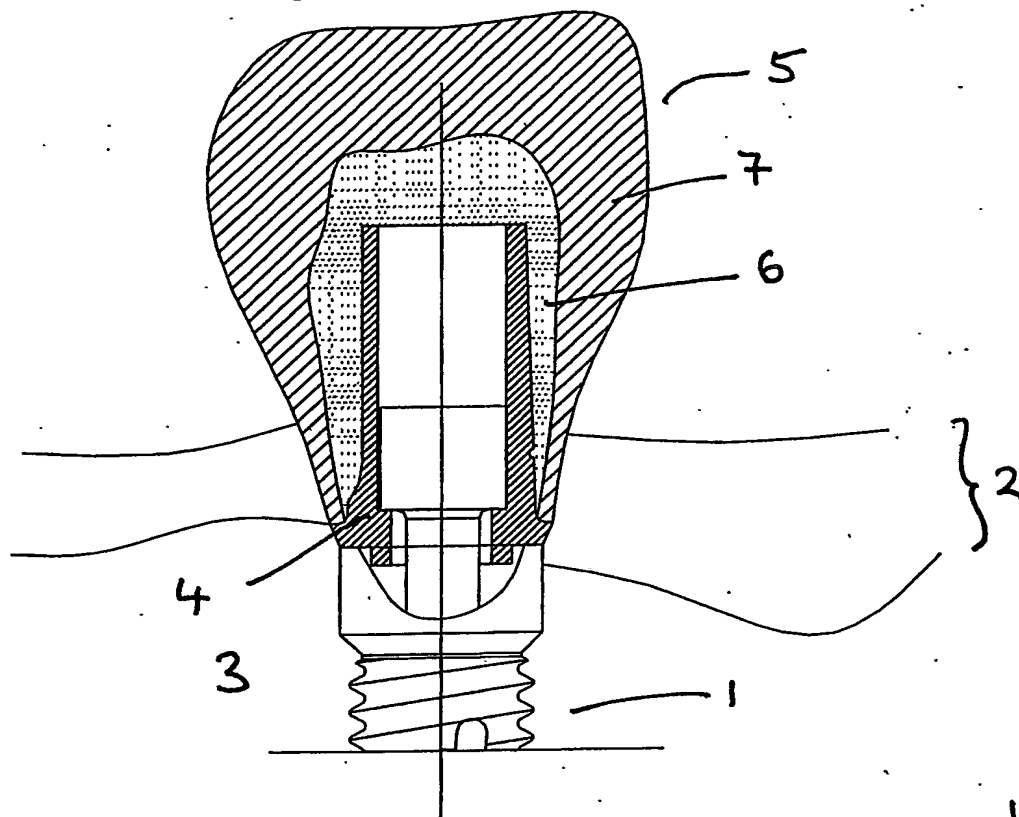


Fig 2

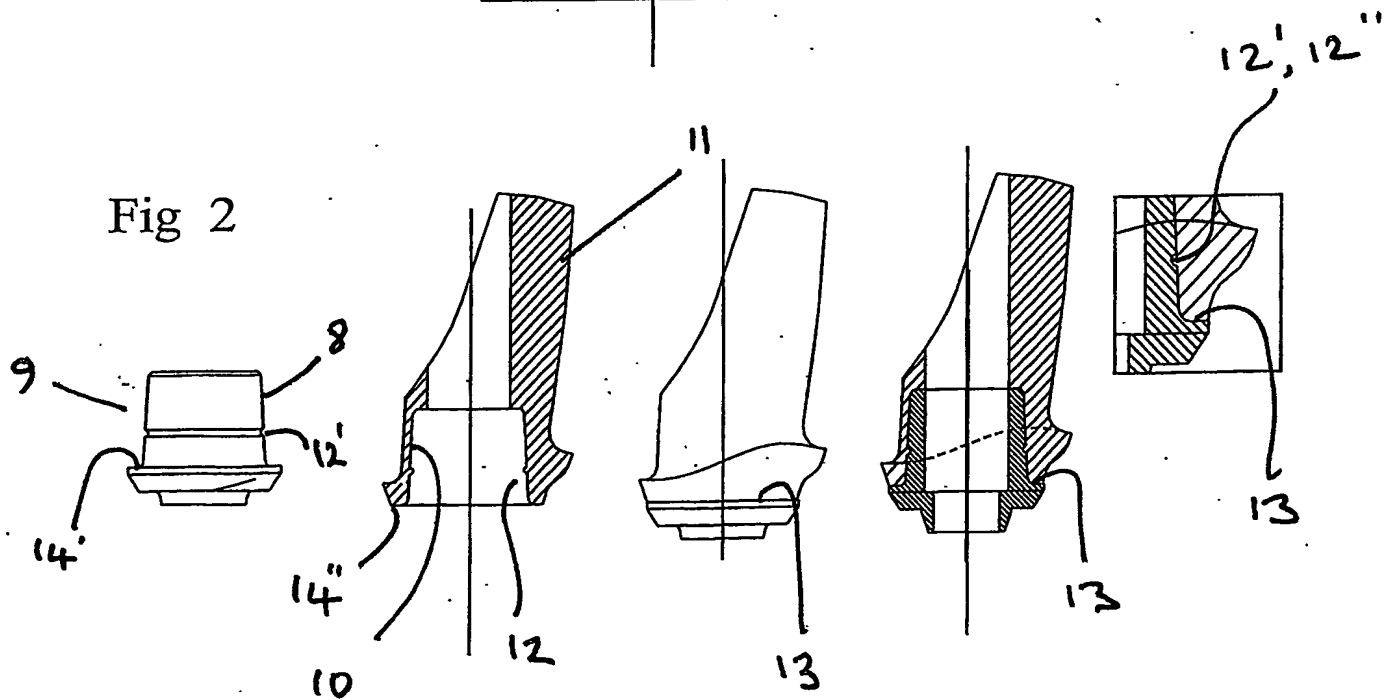


Fig 3

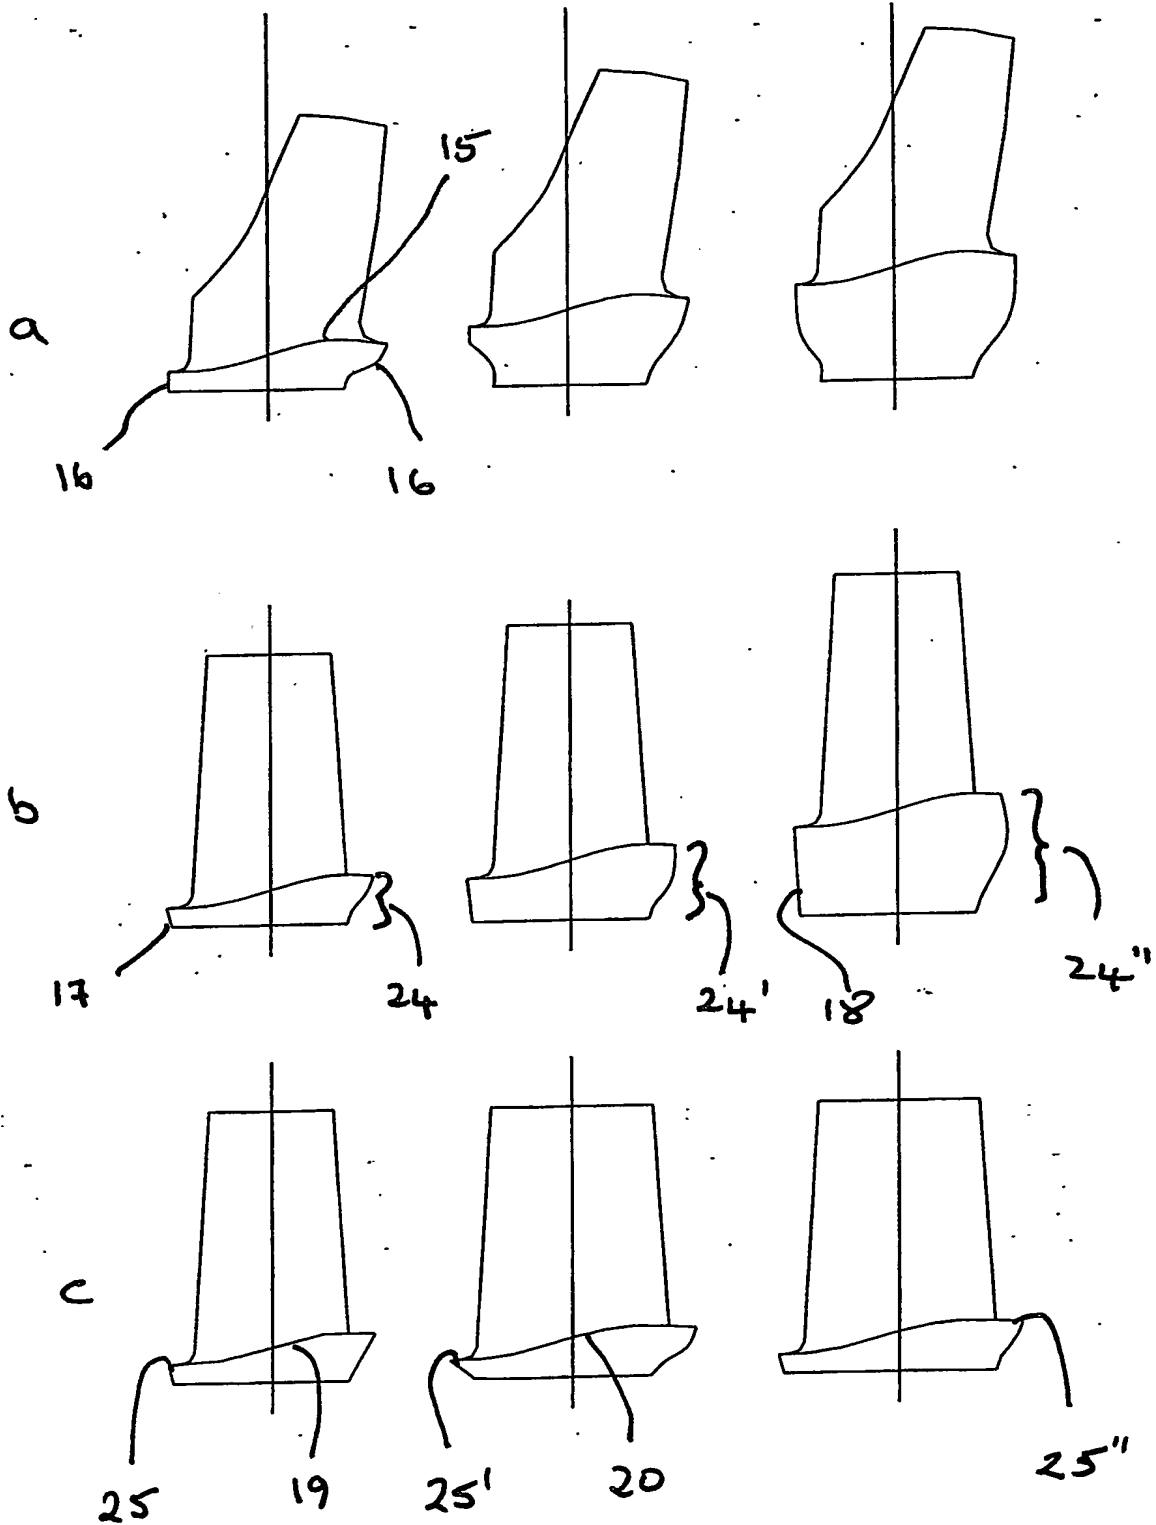


Fig 4

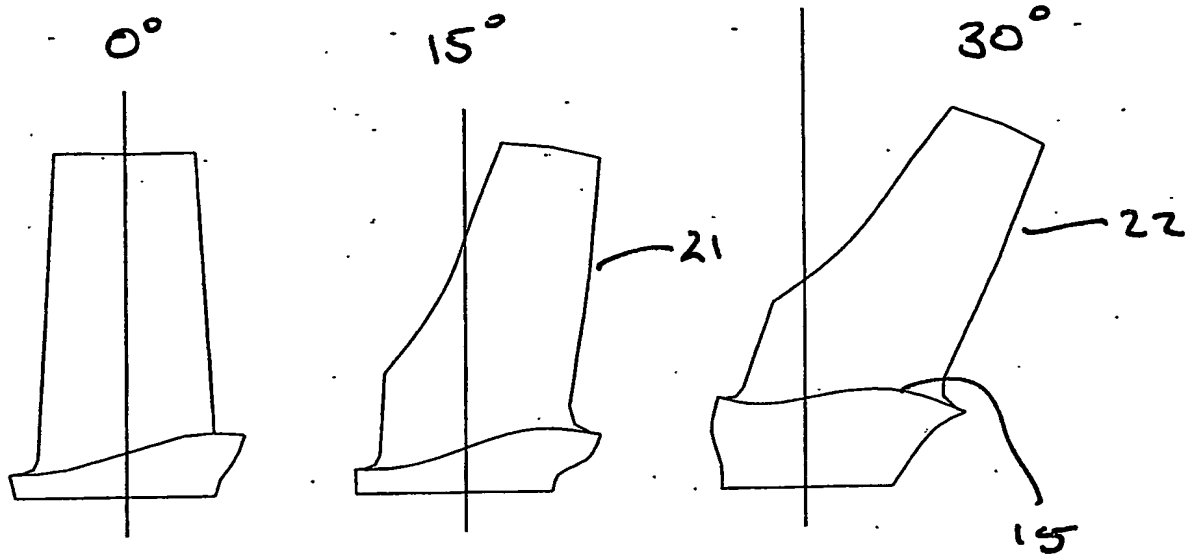


Fig 5

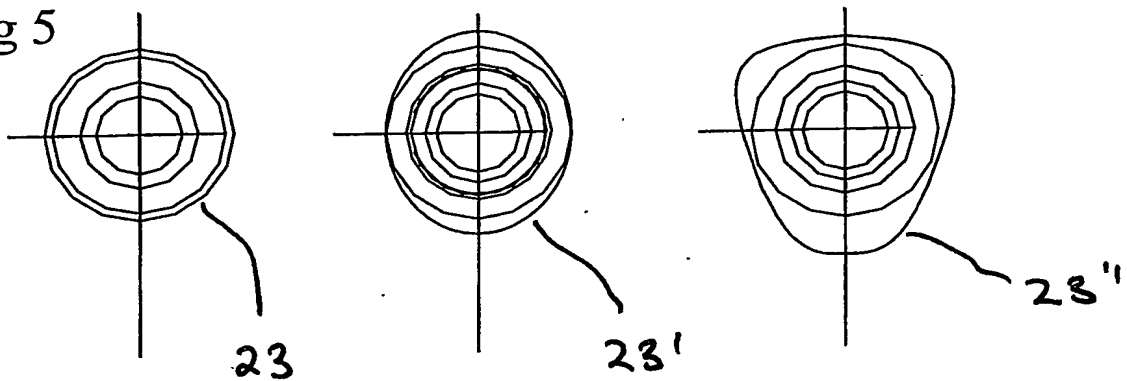


Fig 6

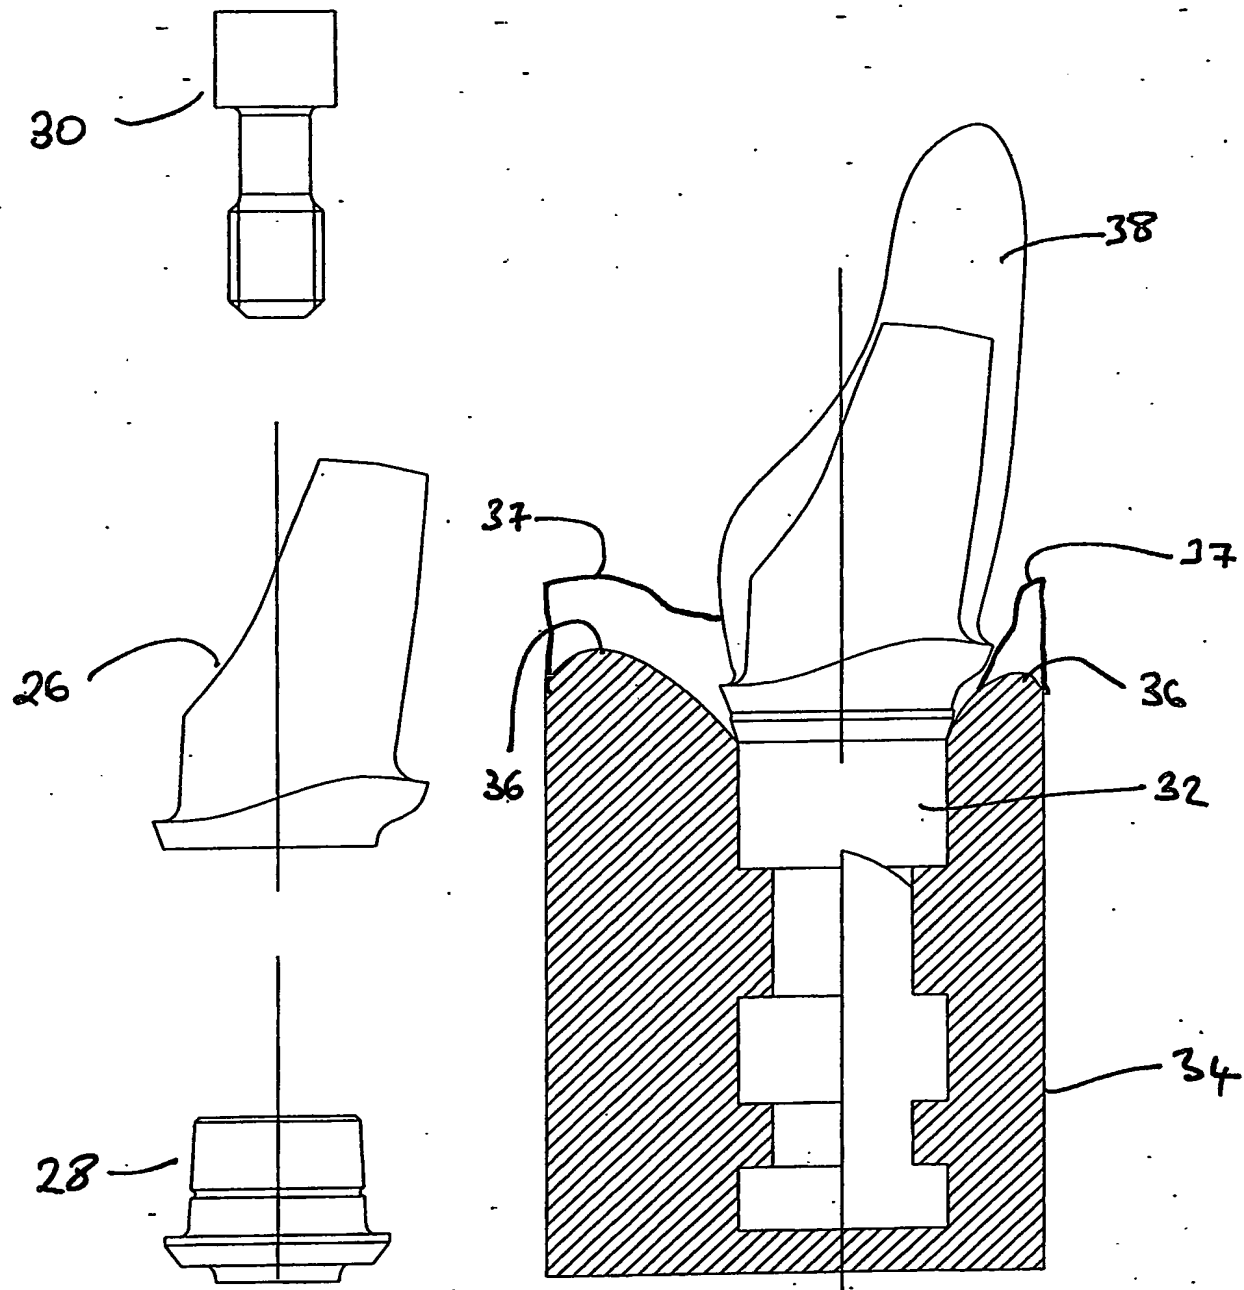


Fig 7

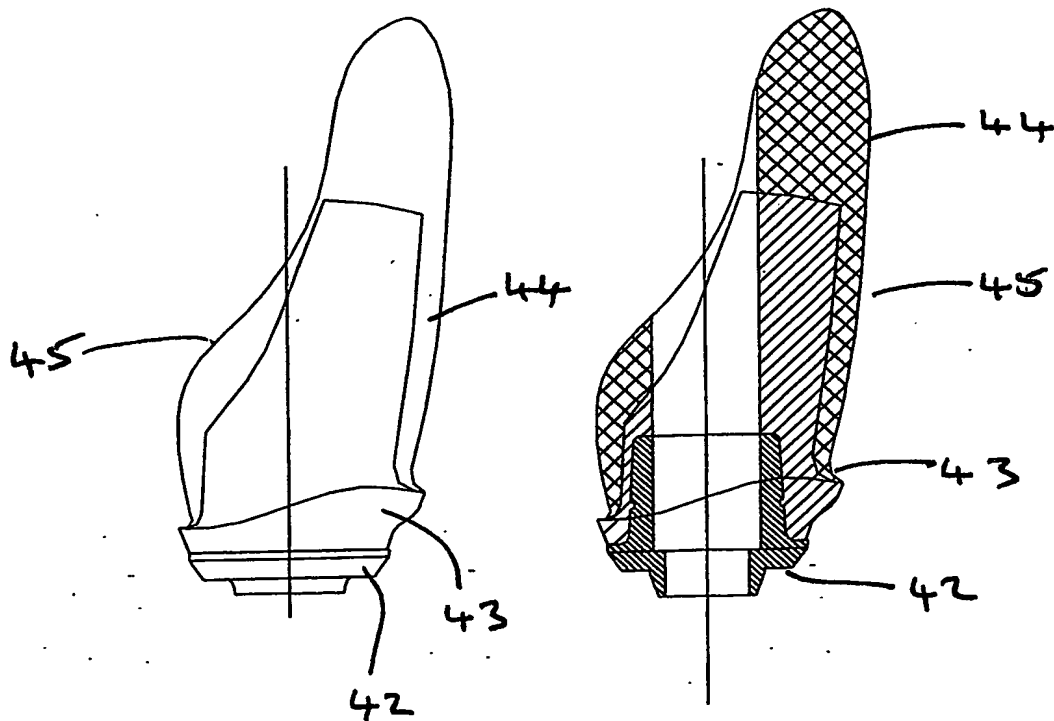


Fig 8


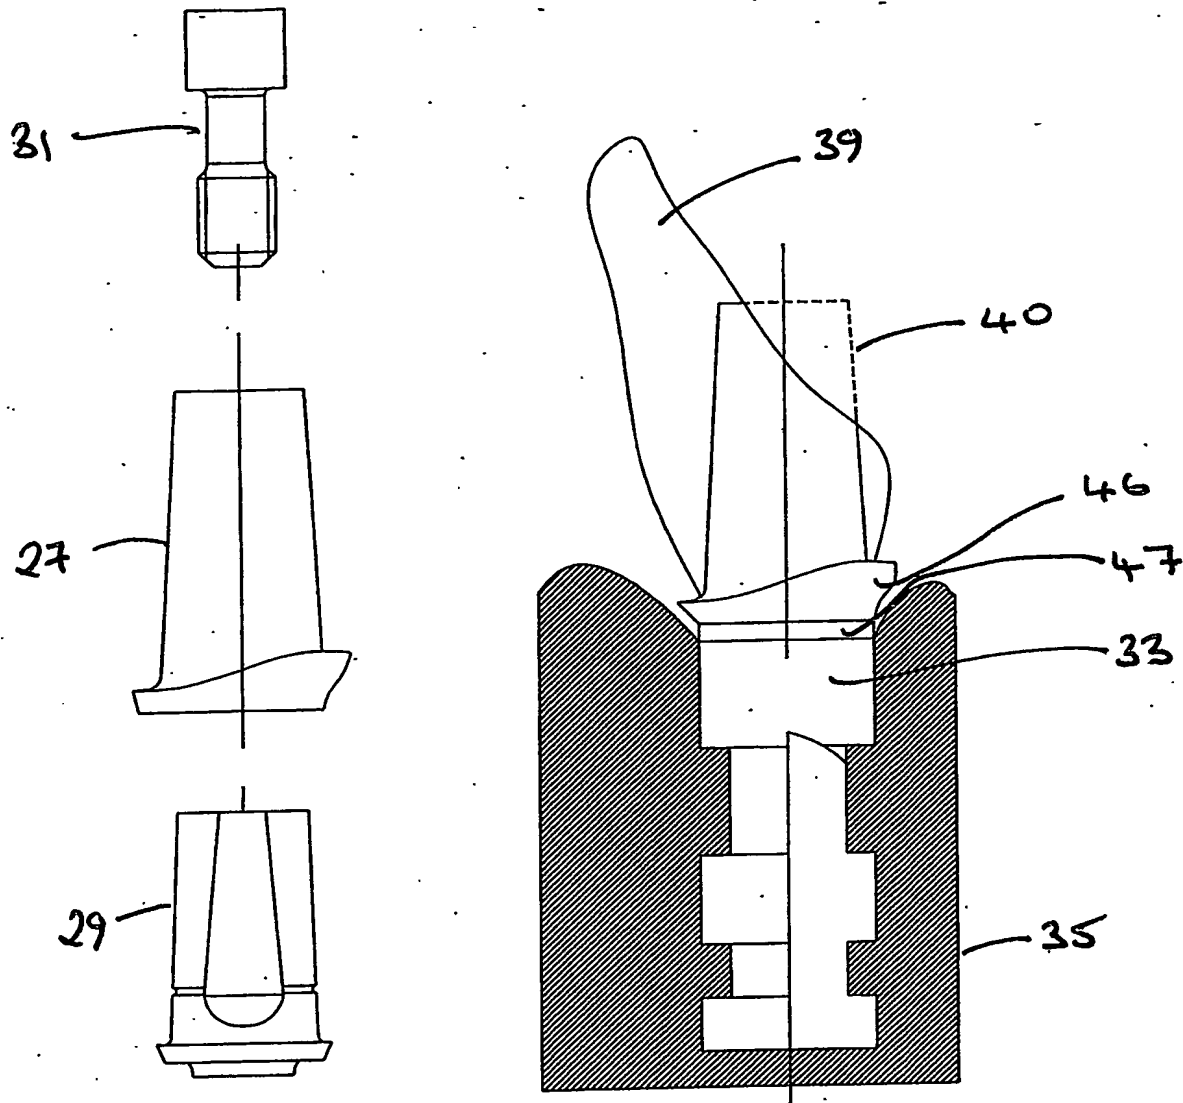


Fig 9

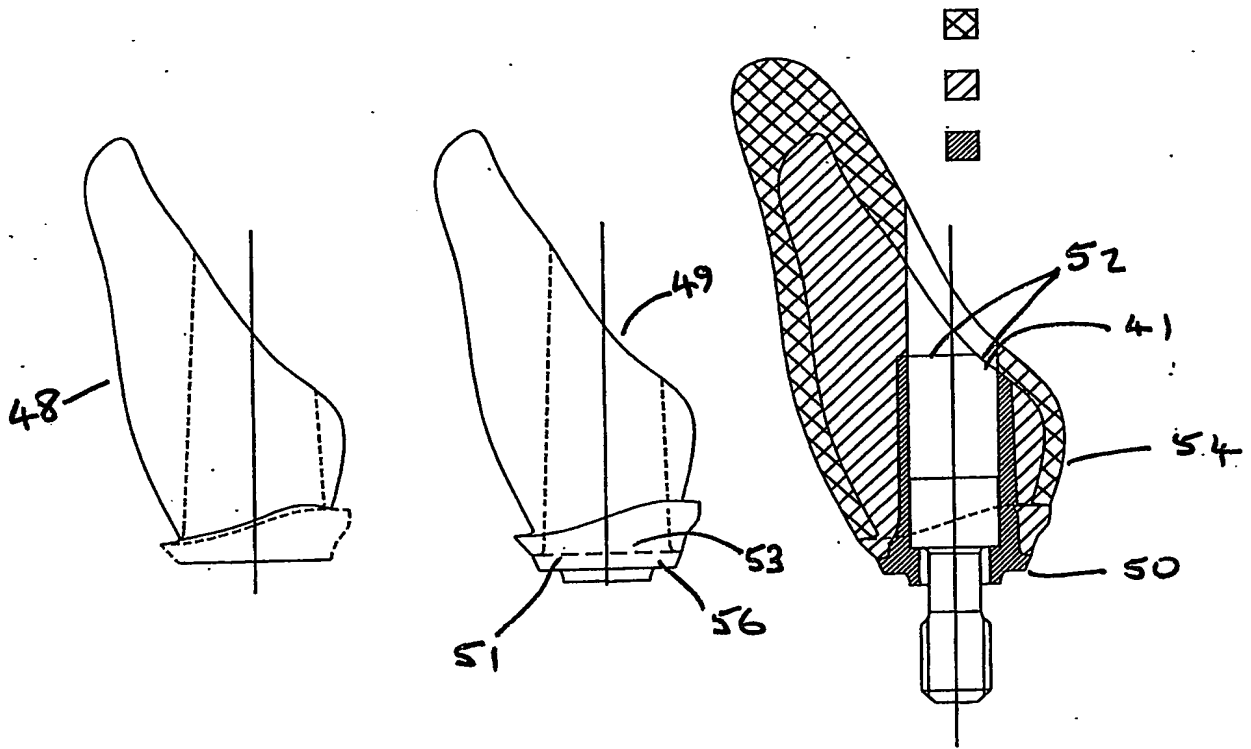

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.